


www.newmaker.com

冷冲模侧刃和导料装置 导料板

Pitch punch and stock guide set for cold press dies  
Stock guide plate

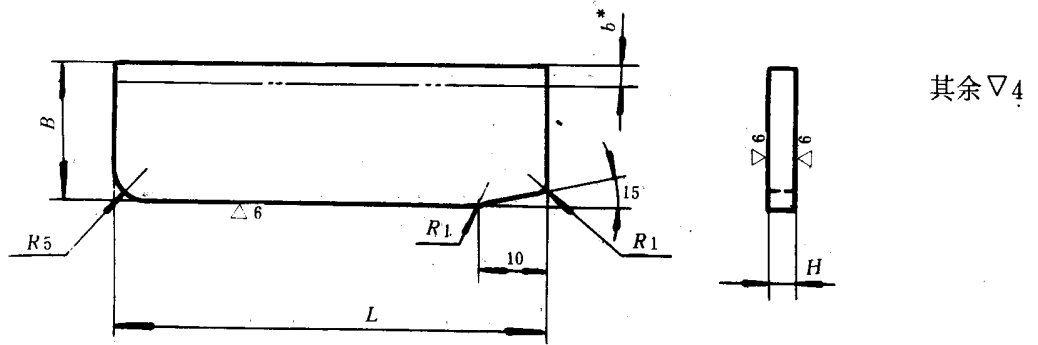

标记示例:

长度  $L = 100$  mm、宽度  $B = 30$  mm、厚度  $H = 8$  mm、材料为 A3 的导料板:

导料板  $100 \times 30 \times 8$  GB 2865.5—81 · A3

mm															
$L$	$B$	$H$	$L$	$B$	$H$	$L$	$B$	$H$	$L$	$B$	$H$				
50	15	4	83	20	4	100	45	10	125	20	6				
		6			6			12			25	6			
	20	4		6	4		30	6							
		6		8	6			8		35	6				
63	15	4		100	30		6	120			25	6	125	40	6
		6					8			8		45			8
	20	4			6		6			50	8				
		6			8		10				10	50		8	
70	15	4	100		20	4	120		35	6	125			45	6
		6				6				8		50			10
	20	4			6	6			50	10					
		6			8	12				12		50		10	
80	20	4		100	30	6		120	45	8			125	50	8
		6				8				10		50			10
	25	6			6	6			50	10					
		8			8	12				50		10			
	30	6	6		40	6	50		8		140	20		4	
		8	8			10			10	6					
	35	6	10		45	8	125		20	20	4	140		25	6
		8	8			8									8

续表

mm

L	B	H	L	B	H	L	B	H	L	B	H			
140	30	6	160	45	12	200	35	6	240	45	8			
		8		50	8			10			10	12		
	35	6			25			6			40	6	50	8
		8		8			8	10				12		
	40	6	165	30	6		45	8		55		55	10	12
		8			8			10			12		15	
		10		35	6			50			8	60	60	10
	45	8			8		10			12	15			
		12		40	6		55	10		65	65	12	15	
	50	8			8			10				12	15	
		10	10		12			15						
	145	20	4	180	45		8	220		25	6	250	25	6
6			50			8	10		12		8			
25		6			25	6	30		6		30			8
		8	8			10			12	15				
30		6	185		30	6			35	6	35		8	10
		8				8	10			12			15	
35		6			40	6	40			8	40		40	8
		8				8			10	12				
		10			45	6			50	8			50	50
40		8				8	10			12				
		12	10			12	15							
160		20	4		200	45	8		240	45	8		250	50
	6		50	8			10	12			10			
	25	6		25		6	55	8			55	10		
		8	8			10		12		15				
	30	6	190	30		6		60		60	60	10		12
		8				8	10					12		
	35	6		40		6	70			8	70	70		8
		8				8		10		12				
		10		10		12		15						
	40	6		200		25	6	75		75	75	10		12
		8	8				10					12		
		45	6			30	6			80	80	80		10
8			8		10		12							
50		6	200		30	6	85	85	85		10	12		
		8				8				10	12			
55	6	35			6	90		90	90	10	12			
	8				8		10			12				
10	10	12			15									
45	6	200			25	6	95	95	95	10	12			
	8		8			10				12				
	50		6		30	6		100	100	100	10	12		
			8	8		10	12							
	55		6	200	30	6	105		105	105	10	12		
			8			8		10			12			
60	6		35		6	110		110	110	10	12			
	8				8		10			12				
10	10		12		15									

www.newmaker.com

续表

mm

L	B	H	L	B	H	L	B	H	L	B	H											
250	70	18	280	55	10	310	40	12	315	60	15											
260	25	6			60		12	55		45	8	60	35	8								
		8					15				10			10								
		8					10				12			8								
	30	8					30			8	50			55	8	40	8					
		10								10					12		10					
	35	8		290			40			15	45			60	8	50	45	8				
		10			8			10		10		12	10									
	40	8			35			45		8		50	65		10			55	55	8		
		10								10					12					15	12	10
		12								10					15					18	15	12
	45	8						30		55					8					40	70	10
		10	10			12	15		12		10											
		12	12			15	18		15		12											
	50	8	310		60	10	45		75	12	55	375	8									
		10				10				12			15	12	10							
		12				12				15			18	15	12							
	55	8				25		60		10			30	80	12	40	40	8				
		10								10					12			15	12	10		
12		12								15					18			15	12			
60	8	20			65		12	25	85	15	45	50			8							
	10						10			12					15			12	10			
	12						12			15					18			15	12			
30	8				315	30	10			35			90	12	50	375	8					
	10			10			12							15			12	10				
	12			12			15							18			15	12				
35	8	25		35			8	40	95		10	55		55			8					
	10						10				12						15	12	10			
	12						12				15						18	15	12			
40	8			20		40	10			30	100		12		60	60	8					
	10						10						12				15	12	10			
	12						12						15				18	15	12			
45	8	310	35			10	35	105	12			60	60	8								
	10					10			12					15			12	10				
	12					12			15					18			15	12				
50	8			25		40			10	40	110			12	65	65	8					
	10								10					12			15	12	10			
	12								12					15			18	15	12			

注: b\*系设计修正量。

材料: A3 GB 700-79。

45号钢 GB 699-65。

热处理: 45号钢调质HRC 28~32。

技术条件: 按GB 2870-81的规定。