

www.newmaker.com


中华人民共和国国家标准

UDC 621.961.02

冷冲模挡料和弹顶装置 始用挡料装置

GB 2866.1-81

Stock stop and spring knockout unit of cold press dies  
Starting stop set

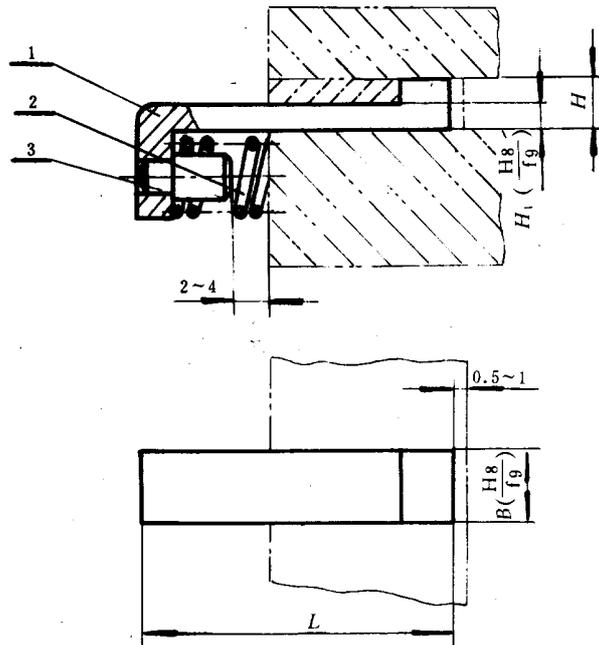

标记示例:

长度 $L = 45\text{mm}$ 、厚度 $H = 8\text{mm}$ 的始用挡料装置:

挡料装置 45×8 GB 2866.1-81


GB 2866.1-81

表 1

基本尺寸		零件件号、名称及标准编号			基本尺寸		零件件号、名称及标准编号		
		1	2	3			1	2	3
L	H	始用挡料块 GB 2866.1-81	弹 簧 GB 2089-80	弹簧芯柱 GB 2866.2-81	L	H	始用挡料块 GB 2866.1-81	弹 簧 GB 2089-80	弹簧芯柱 GB 2866.2-81
		数 量					数 量		
		1	1	1			1	1	1
		规 格					规 格		
35	4	35 × 4	0.5 × 6 × 20	4 × 16	60	10	60 × 10	0.8 × 8 × 20	6 × 16
40		40 × 4			65		65 × 10		
45		45 × 4			70		70 × 10		
35	6	35 × 6	0.8 × 8 × 20	6 × 16	75	12	75 × 10	1.0 × 10 × 20	8 × 18
40		40 × 6			80		80 × 10		
45		45 × 6			50		50 × 12		
50		50 × 6			55		55 × 12		
55		55 × 6			60		60 × 12		
60		60 × 6			65		65 × 12		
65		65 × 6			70		70 × 12		
70	70 × 6	75	75 × 12						
45	8	45 × 8	0.8 × 8 × 20	6 × 16	80	15	80 × 12	1.0 × 10 × 20	8 × 18
50		50 × 8			85		85 × 12		
55		55 × 8			90		90 × 12		
60		60 × 8			75		75 × 15		
65		65 × 8			80		80 × 15		
70	70 × 8	85	85 × 15						
50	10	50 × 10	0.8 × 8 × 20	6 × 16	90	15	90 × 15	1.0 × 10 × 20	8 × 18
55		55 × 10							

1 始用挡料块  
规格: L × H

其余▽4

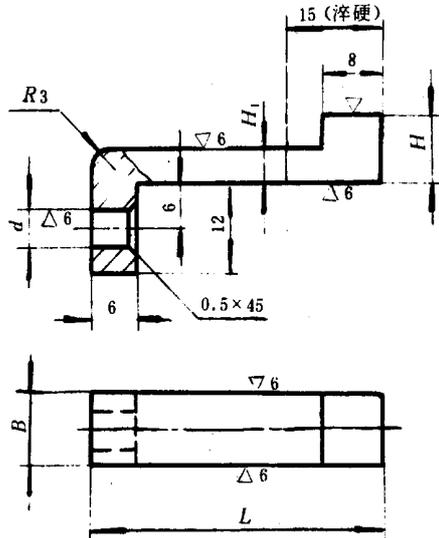

mm


L	B (f9)		H (c12)		H <sub>1</sub> (f9)		d (H7)				
	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差			
35	6	-0.010 -0.040	4	-0.070 -0.190	2	-0.006 -0.031	3	+0.010 0			
40											
45											
35			6		-0.010 -0.040		6	-0.070 -0.190	-0.006 -0.031	4	+0.012 0
40											
45											
50											
55											
60											
65											
70											

www.newmaker.com

GB 2866.1—81

1 始用挡料块  
规格: L × H

其余▽4

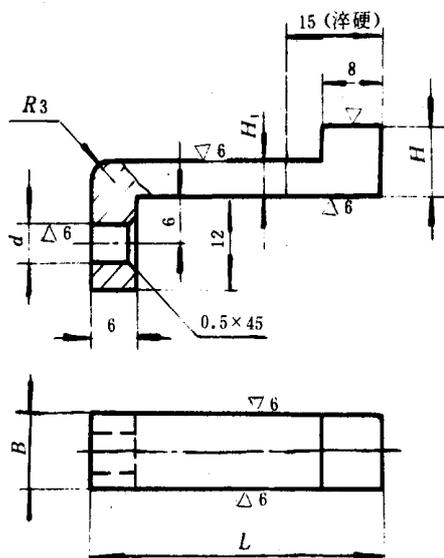

mm

L	B (f9)		H (c12)		H <sub>1</sub> (f9)		d (H7)					
	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差				
35	6	-0.010 -0.040	4	-0.070 -0.190	2	-0.006 -0.031	3	+0.010 0				
40												
45												
35			6		-0.010 -0.040		6	-0.070 -0.190	3	-0.006 -0.031	4	+0.012 0
40												
45												
50												
55												
60												
65												
70												

