


www.newmaker.com

冷冲模挡料和弹顶装置 弹簧芯柱

Stock stop and spring knockout unit of cold press dies
Mandrel for spring

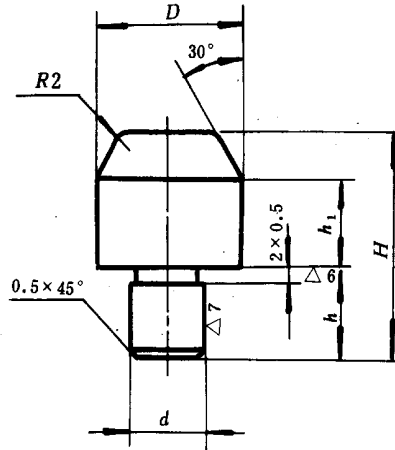

其余▽4

标记示例:

直径 $D = 20\text{ mm}$ 、高度 $H = 30\text{ mm}$ 的弹簧芯柱:

芯柱 20×30 GB 2866.2-81

mm

D	d (r6)		H	h	h ₁
	基本尺寸	极限偏差			
4	3	+0.016 +0.010	16	6	6
6	4	+0.023 +0.015			
8	6		+0.028 +0.015	18	8
10		20			
12	8	+0.028 +0.019	25	10	10
14			30	12	12
16	10				
20	12	+0.034 +0.023	40	15	15
24			14	+0.034 +0.023	45
28	12				
34	14				
42					

材料: A3 GB 700-79。

技术条件: 按GB 2870-81的规定。