

www.newmaker.com

中华人民共和国国家标准

UDC 621.961.02


冷冲模卸料装置 带肩推杆

GB 2867.1-81


Stripping set of cold press dies
Shouldered knockout pin

其余▽4

A型

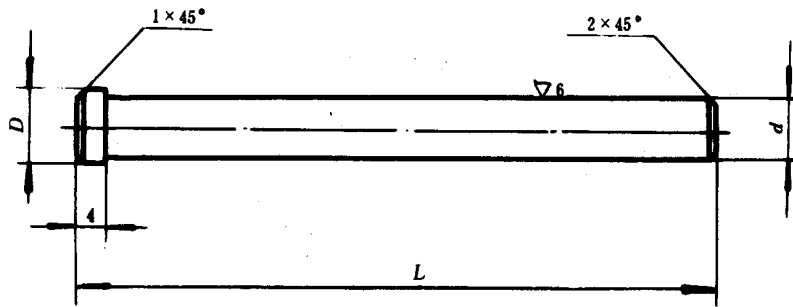

B型

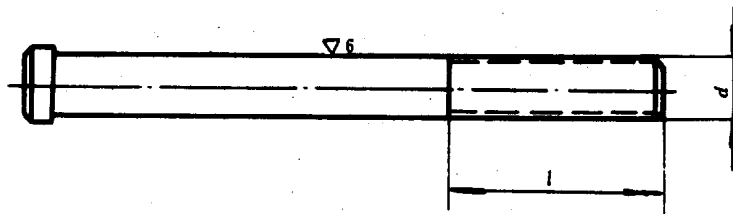

标记示例:

直径 $d = 8$ mm、长度 $L = 90$ mm的A型带肩推杆:

推杆 A 8 × 90 GB 2867.1-81

mm

d		L	D	l	d		L	D	l	d		L	D	l							
A型	B型				A型	B型				A型	B型										
6	M 6	40	8	—	10	M 10	100	13	30	16	M 16	160	20	40							
		45					110					180									
		50					120					200									
		55					130					220									
		60					20			—	12	M 12	140	15	—	20	M 20	90	24	—	
		70											150					100			
		80											160					110			
		90											170					120			
		100											70					130			130
		110											75					140			140
		120											80					150			150
		130											85					160			160
8	M 8	50	10	—	12	M 12	90	15	—	25	M 25	180	30			45					
		55					100					200									
		60					110					220									
		65					120					240									
		70					130					260									
		80					140					100									
		90					150					110									
		100					160					120									
		110					170					130									
		120					180					140									
10	M 10	60	13	—	16	M 16	190	20	—	25	M 25	150	30	50							
		65					80					160									
		70					90					180									
		75					100					200									
		80					110					220									
		90					120					240									
							130					260									
							140					280									

材料：45号钢 GB 699—65。

热处理：硬度HRC 43~48。

螺纹基本尺寸按GB 196—81规定，螺纹公差按GB 197—81规定的3级精度。

技术条件：按GB 2870—81规定。