

www.newmaker.com


中华人民共和国国家标准

UDC 621.961.02

冷冲模模板 矩形垫板

GB 2858.3—81

Plates for cold press dies  
Rectangular backing plate

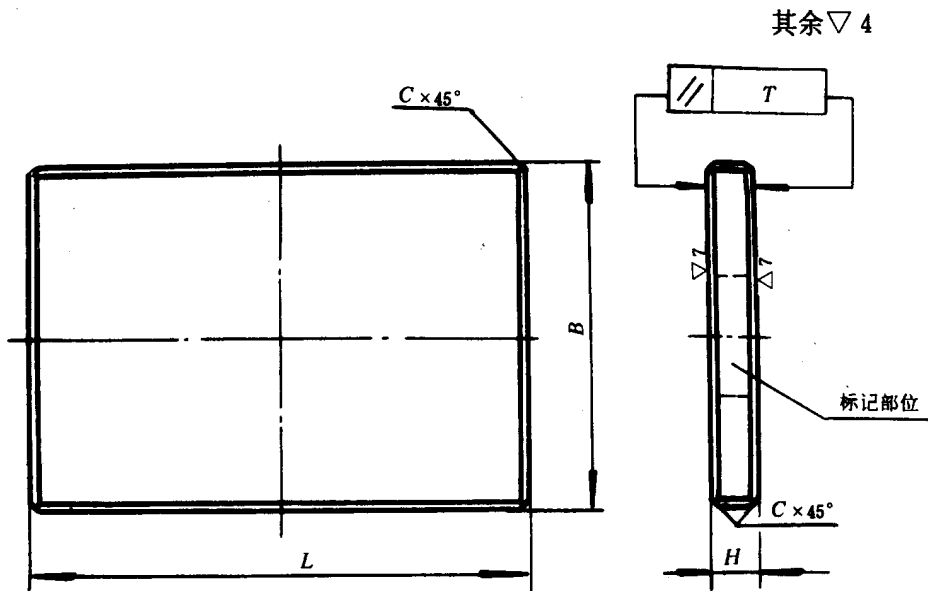

标记示例:

长度  $L = 125\text{mm}$ 、宽度  $B = 100\text{mm}$ 、厚度  $H = 6\text{mm}$ 、材料为45号钢的矩形垫板:

垫板  $125 \times 100 \times 6$  GB 2858.3—81·45

mm											
L	B	H	C	L	B	H	C	L	B	H	C
63	50	4	1	100		4	1	(140)		6	
		6				8					
63	63	4		125	80	4		160	100	6	
		6				8					
80		4		(140)	6	200		6			
		6			8						
100		4		100	4	125		6			
		6			8						
80	80	4		125	100	6		(140)	125	6	
		6				8					

续表

mm

L	B	H	C	L	B	H	C	L	B	H	C			
160	125	6	1.5	250	(140)	8	1.5	250	200	8	1.5			
		8				10				10				
200		6		160		8		(280)		200		10	315	10
		8				10						12		
250		8		200		8		160		200		10	250	10
		10				10						12		
(140)	(140)	6	1.5	250	160	8	1.5	250	250	10	2			
		8				10				12				
160		6		(280)		8		200		200		10	(280)	10
		8				10						12		
200		6		200		8		200		200		10	315	10
		8				10						12		

注：括号内的尺寸尽可能不采用。

材料：45号钢 GB 699-65

T7A GB 1298-77。

热处理：45号钢 T7A硬度设计自定。

技术条件：按GB 2870-81的规定。